



Order no.: 116109

2-section rope-extension ladder ÖNORM F4047

Specification

Intended use Rescue	Ladder length retracted 5.9 m	Ladder length extended 10 m	Setting angle 70 °	Clear width between rungs 265 mm
Clear width, upper ladder 360 mm	Clear width, lower ladder 420 mm	Outer width 550 mm	Ladder feet Steel point	Depth of side-rails 90 mm
Width of side-rails 25 mm	Number of steps/rungs 2x 19 rungs	Max. load capacity 216 kg	Persons max. 2	Material Aluminium
Transport dimensions 5088.5 x 550 x 160 mm, 49 kg	Business division MUNK Rettungstechnik	Order no. 116109		

Facts

- 2-section rope-extension ladder made of aluminium
- Rescue ladder compliant with ÖNORM F4047
- With rope pulley, locking hook and rope brake
- Edged rung-to-side-rail connection



- Round rungs, Ø 34 mm, including set-up aid at the bottom
- Corrosion-resistant fixtures made of galvanised steel
- Lower ladder with steel spikes
- Upper ladder with wall wheels
- Permissible load: 2 persons

Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001


Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users



More product pictures

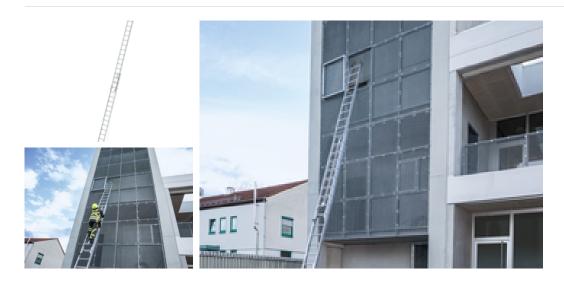



Corporate certifications

on sustainability criteria







