



Order no.: 116111

Hook ladder type B ÖNORM F 4047 and EN 1147

Specification

Intended use Access	Ladder length 4.86 m	Clear width between rungs 250 mm	Outer width 350 mm	Ladder feet Ladder shoe
Depth of side-rails 50 mm	Width of side-rails 25 mm	Step/Rung height 28 mm	Step depth 29 mm	Number of steps/rungs 15 rungs
Max. load capacity 150 kg	Persons max. 1	Material Aluminium	Transport dimensions 4880 x 350 x 665 mm, 14.5 kg	Business division MUNK Rettungstechnik
Order no. 116111				

Facts

- Hook ladder made of aluminium
- Access ladder compliant with ÖNORM F4047 and EN 1147
- With folding ladder support as wall spacer
- Hooks made of galvanised steel with window insertion bolts and ring eye for holding snap hook



- 4-fold edged rung-to-side-rail connection
- Non-slip and replaceable ladder shoes
- Permissible load: 108 kg / 1 person

Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001


Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users



More product pictures

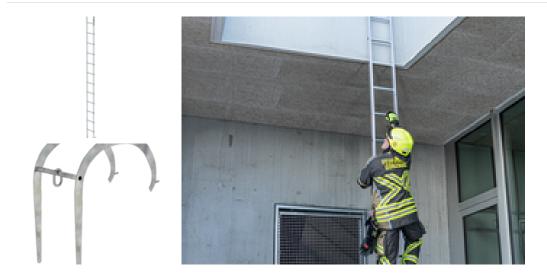



Corporate certifications

on sustainability criteria







