

Order no.: 052706

Folding platform ladder with narrow undercarriage



Number of steps

- 5
- 6
- 7
- 8
- 10
- 12
- 14



Specification

Working height 3.4 m	Step design Steps	Number of steps/rungs 6 steps	Platform included as step Yes	Platform height 1.38 m
Platform length 650 mm	Platform width 600 mm	Step depth 80 mm	Step/Rung distance 235 mm	Height 2.42 m
Total length folded 3 m	Base spread 1.5 m	Inclination 70 °	Outer width 650 mm	Stabiliser width 850 mm
Depth of side-rails 73 mm	Depth of side-rails, support 58 mm	Max. load capacity 150 kg	Design type Single-sided access Freestanding With chassis beam	Ballast weight 50 kg
Weight incl. ballast weight 89 kg	Transport dimensions 3040 x 760 x 220 mm, 30 kg	Transport dimensions 2 860 x 260 x 235 mm, 56 kg	Business division MUNK Günzburger Steigtechnik	Order no. 052706

Facts

- Platform ladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm

- Spacious platform with grooves for secure footing (650 x 600 mm)
- 4-fold edged step-to-side-rail connection
- With handrail on both sides, 3-sided, 1,000 mm high railing with knee and foot rails as well as safety rope
- Support part with narrow undercarriage and ballast weight for high stability
- Folds for compact storage thanks to sturdy steel hinges (when ballast weight is on the outside)
- Particularly suitable for narrow shelving aisles etc.
- Integrated Ø 125 mm fixed castors with locking device for quick transportation when folded out
- nivello® ladder shoes with patented 2-axis inclination technology
- Generous sized tool tray
- Outer width: 650 mm (without stabiliser)
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

Scope of supply


- Ladder: 1 x
- Instructions for use and operation: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct

- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

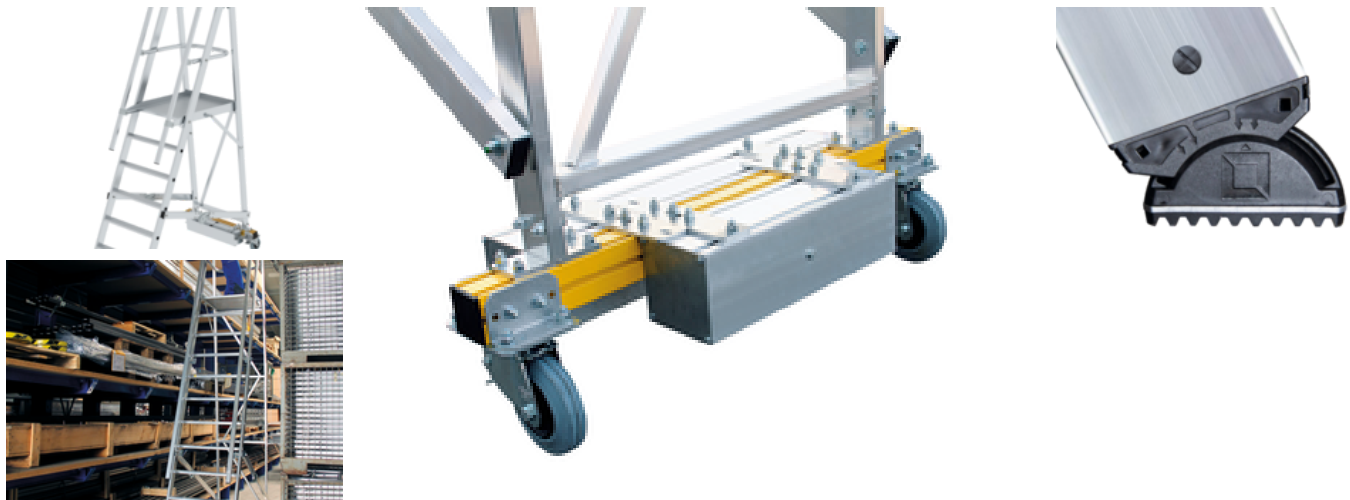

Added value

Safe working

- Handrails for safe ascent and descent
- Large-format, non-slip platforms
- Conical side-rail guide for safe stance
- Railings and knee boards for safe access and stance



The movable ladder shoe sets new standards in stability

[Learn more](#)



Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



Castors

- Ergonomic and comfortable handling
- Simple movement from place to place



Certificates



5011053.24002 -
Certificate Product
Safety Type
approved

Valid in



DIN EN 131-7:2013
DIN EN 131-3:2018

Corporate certifications

on sustainability criteria



Management
System
ISO 9001:2015
ISO 14001:2015

www.tuv.com
ID 9108612548



Nachhaltigkeit

EcoVadis
sustainable supply management

CSR-Rating in Silber 2022