



Order no.: 052714

## Folding platform ladder with narrow undercarriage



Number of steps

- 5
- 6
- 7
- 8
- 10
- 12
- 14

### Specification

Working height 5.25 m	Step design Steps	Number of steps/rungs 14 steps	Platform included as step Yes	Platform height 3.23 m
Platform length 650 mm	Platform width 600 mm	Step depth 80 mm	Step/Rung distance 235 mm	Height 4.28 m
Total length folded 5 m	Base spread 2.4 m	Inclination 70 °	Outer width 650 mm	Stabiliser width 1 m
Depth of side-rails 73 mm	Depth of side-rails, support 58 mm	Max. load capacity 150 kg	Design type Single-sided access   Freestanding   With chassis beam	Ballast weight 160 kg
Weight incl. ballast weight 218 kg	Transport dimensions 5020 x 760 x 220 mm, 47 kg	Transport dimensions 2 1005 x 532 x 245 mm, 166.5 kg	Business division MUNK Günzburger Steigtechnik	Order no. 052714

### Facts

- Platform ladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm

- Spacious platform with grooves for secure footing (650 x 600 mm)
- 4-fold edged step-to-side-rail connection
- With handrail on both sides, 3-sided, 1,000 mm high railing with knee and foot rails as well as safety rope
- Support part with narrow undercarriage and ballast weight for high stability
- Folds for compact storage thanks to sturdy steel hinges (when ballast weight is on the outside)
- Particularly suitable for narrow shelving aisles etc.
- Integrated Ø 125 mm fixed castors with locking device for quick transportation when folded out
- nivello® ladder shoes with patented 2-axis inclination technology
- Generous sized tool tray
- Outer width: 650 mm (without stabiliser)
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

### Scope of supply

- Ladder: 1 x
- Instructions for use and operation: 1 x


### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct

- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

### More product pictures

---

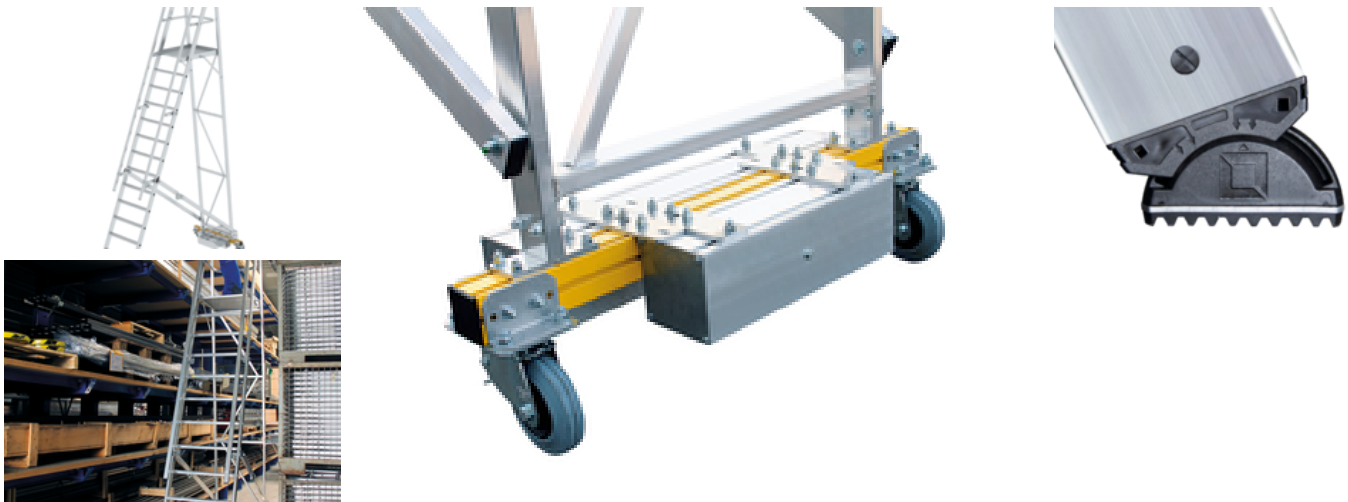

## Added value

---

### Safe working

- Handrails for safe ascent and descent
- Large-format, non-slip platforms
- Conical side-rail guide for safe stance
- Railings and knee boards for safe access and stance



The movable ladder shoe sets new standards in stability

[Learn more](#)



### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Castors

- Ergonomic and comfortable handling
- Simple movement from place to place



## Certificates

---



5011053.24002 -  
Certificate Product  
Safety Type  
approved

Valid in



DIN EN 131-7:2013  
DIN EN 131-3:2018

## Corporate certifications

on sustainability criteria



Management  
System  
ISO 9001:2015  
ISO 14001:2015  
  
www.tuv.com  
ID 9108612548



**Nachhaltigkeit**

**EcoVadis**  
sustainable supply management

CSR-Rating in Silber 2022