

Order no.: 051097

ML platform ladder



Number of steps

- 4
- 5
- 6
- 7
- 8



Specification

Working height 3.6 m	Step design Steps	Number of steps/rungs 7 steps	Platform included as step Yes	Platform height 1.58 m
Platform height up to railing 1 m	Step depth 80 mm	Step/Rung distance 235 mm	Height 2.64 m	Total length folded 2.81 m
Base spread 1.46 m	Inclination 70 °	Lower outer width 680 mm	Depth of side-rails 73 mm	Depth of side-rails, support 58 mm
Max. load capacity 150 kg	Design type Freestanding Single-sided access	Transport dimensions 2806 x 685 x 279 mm, 14.5 kg	Business division MUNK Günzburger Steigtechnik	Order no. 051097

Facts

- Platform ladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- Height of the partial enclosure 1,000 mm
- Large, trapeze-shaped platform (400 / 360 x 425 mm)

- 4-fold edged step-to-side-rail connection
- Conical side-rail guide for safe stance
- Two pre-assembled handrails for safe ascent and descent
- 'safe-cap' ladder joint
- Non-slip ladder shoes
- Spreader lock with two high-strength polyester straps
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

Scope of supply

- Ladder: 1 x
- Handrail (mounted): 2 x
- Assembly instructions: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.

- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories




Ladder joint safe-cap

- Smooth ladder joint with large contact surface and sturdy plastic protective cap
- The 6 rivets and thicker wall thickness provide for greater stability and protection at this sensitive point on the ladder, increasing its service life
- The safe-cap protects the ladder when in use, when loading and storing, as well as the contact surfaces, walls, truck loading areas and the joint itself



Certificates

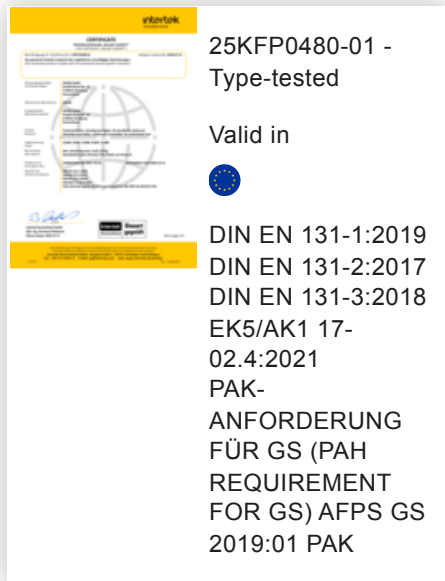

Corporate certifications

on sustainability criteria



Management
System
ISO 9001:2015
ISO 14001:2015

www.tuv.com
ID 9108612548



Nachhaltigkeit

EcoVadis
sustainable supply management

CSR-Rating in Silber 2022